

William Stallings

Computer Organization and Architecture

Chapter 2

Computer Evolution and Performance

AVAILABLE AT:

Onebyzero Edu - Organized Learning, Smooth Career
The Comprehensive Academic Study Platform for University Students in Bangladesh (www.onebyzeroedu.com)

ENIAC - background

- ⌘ Electronic Numerical Integrator And Computer
- ⌘ Eckert and Mauchly
- ⌘ University of Pennsylvania
- ⌘ Trajectory tables for weapons
- ⌘ Started 1943
- ⌘ Finished 1946
 - ☒ Too late for war effort
- ⌘ Used until 1955

ENIAC - details


- ⌘ Decimal (not binary)
- ⌘ 20 accumulators of 10 digits
- ⌘ Programmed manually by switches
- ⌘ 18,000 vacuum tubes
- ⌘ 30 tons
- ⌘ 15,000 square feet
- ⌘ 140 kW power consumption
- ⌘ 5,000 additions per second

von Neumann/Turing

- ⌘ Stored Program concept
- ⌘ Main memory storing programs and data
- ⌘ ALU operating on binary data
- ⌘ Control unit interpreting instructions from memory and executing
- ⌘ Input and output equipment operated by control unit
- ⌘ Princeton Institute for Advanced Studies
 - ☐ IAS

⌘ Completed 1952

Structure of von Nuemann machine

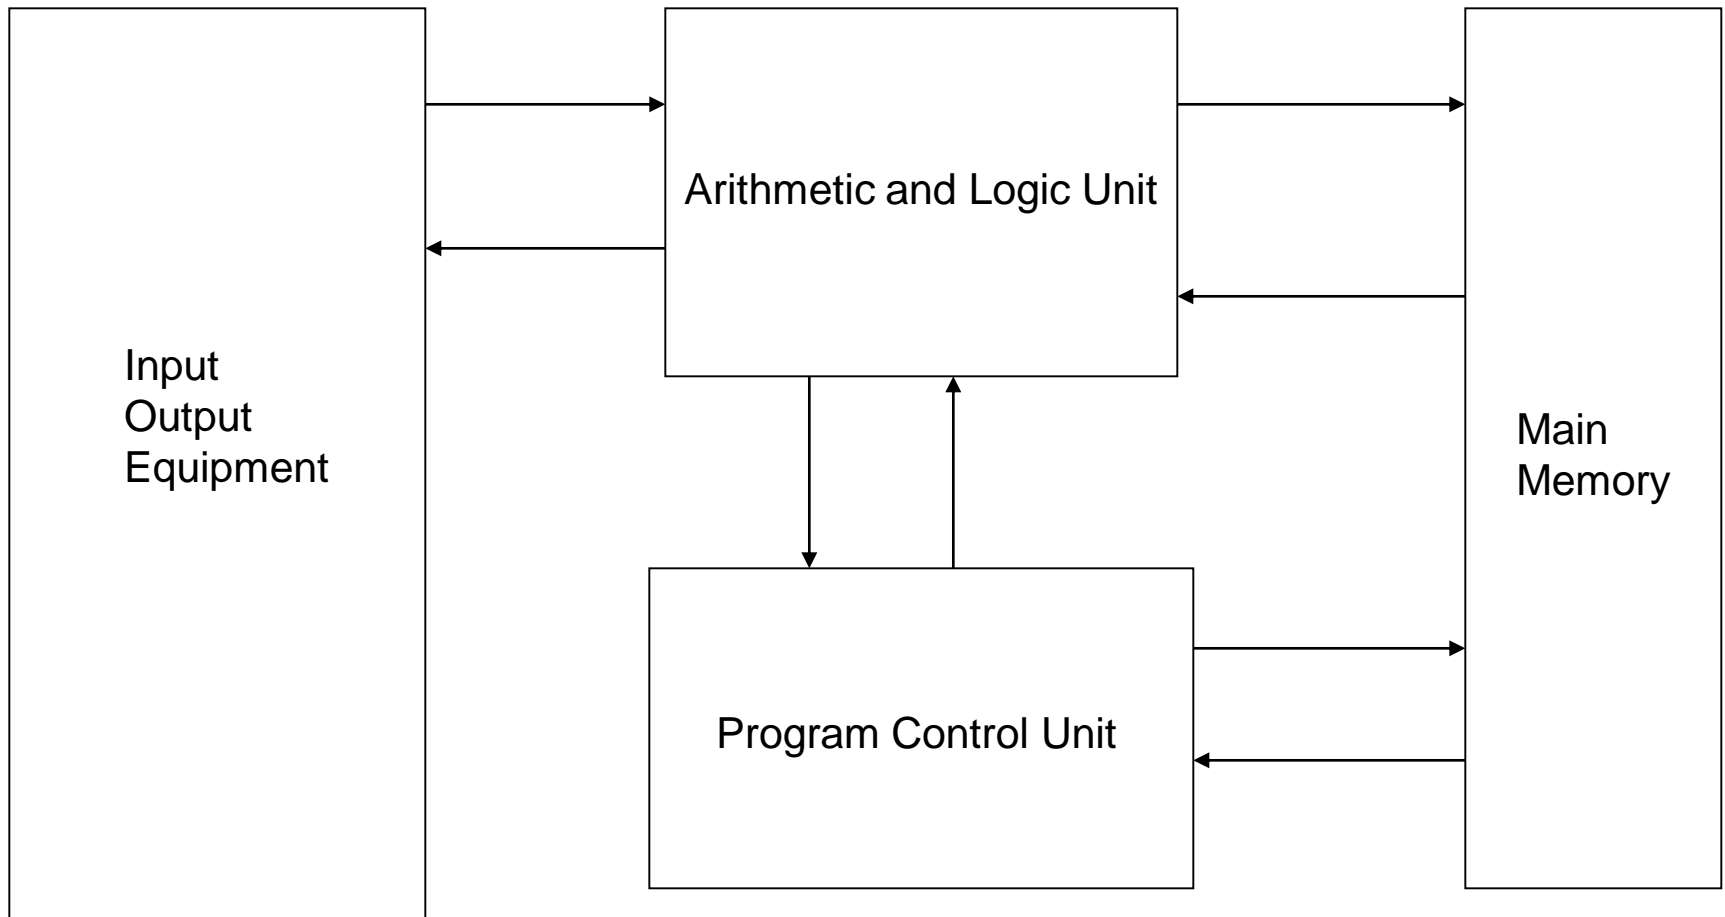

AVAILABLE AT:

Onebyzero Edu - Organized Learning, Smooth Career

The Comprehensive Academic Study Platform for University Students in Bangladesh (www.onebyzeroedu.com)

IAS - details

⌘ 1000 x 40 bit words

- ☑ Binary number

- ☑ 2 x 20 bit instructions

⌘ Set of registers (storage in CPU)

- ☑ Memory Buffer Register

- ☑ Memory Address Register

- ☑ Instruction Register


- ☑ Instruction Buffer Register

- ☑ Program Counter

- ☑ Accumulator

- ☑ Multiplier Quotient

Structure of IAS - detail

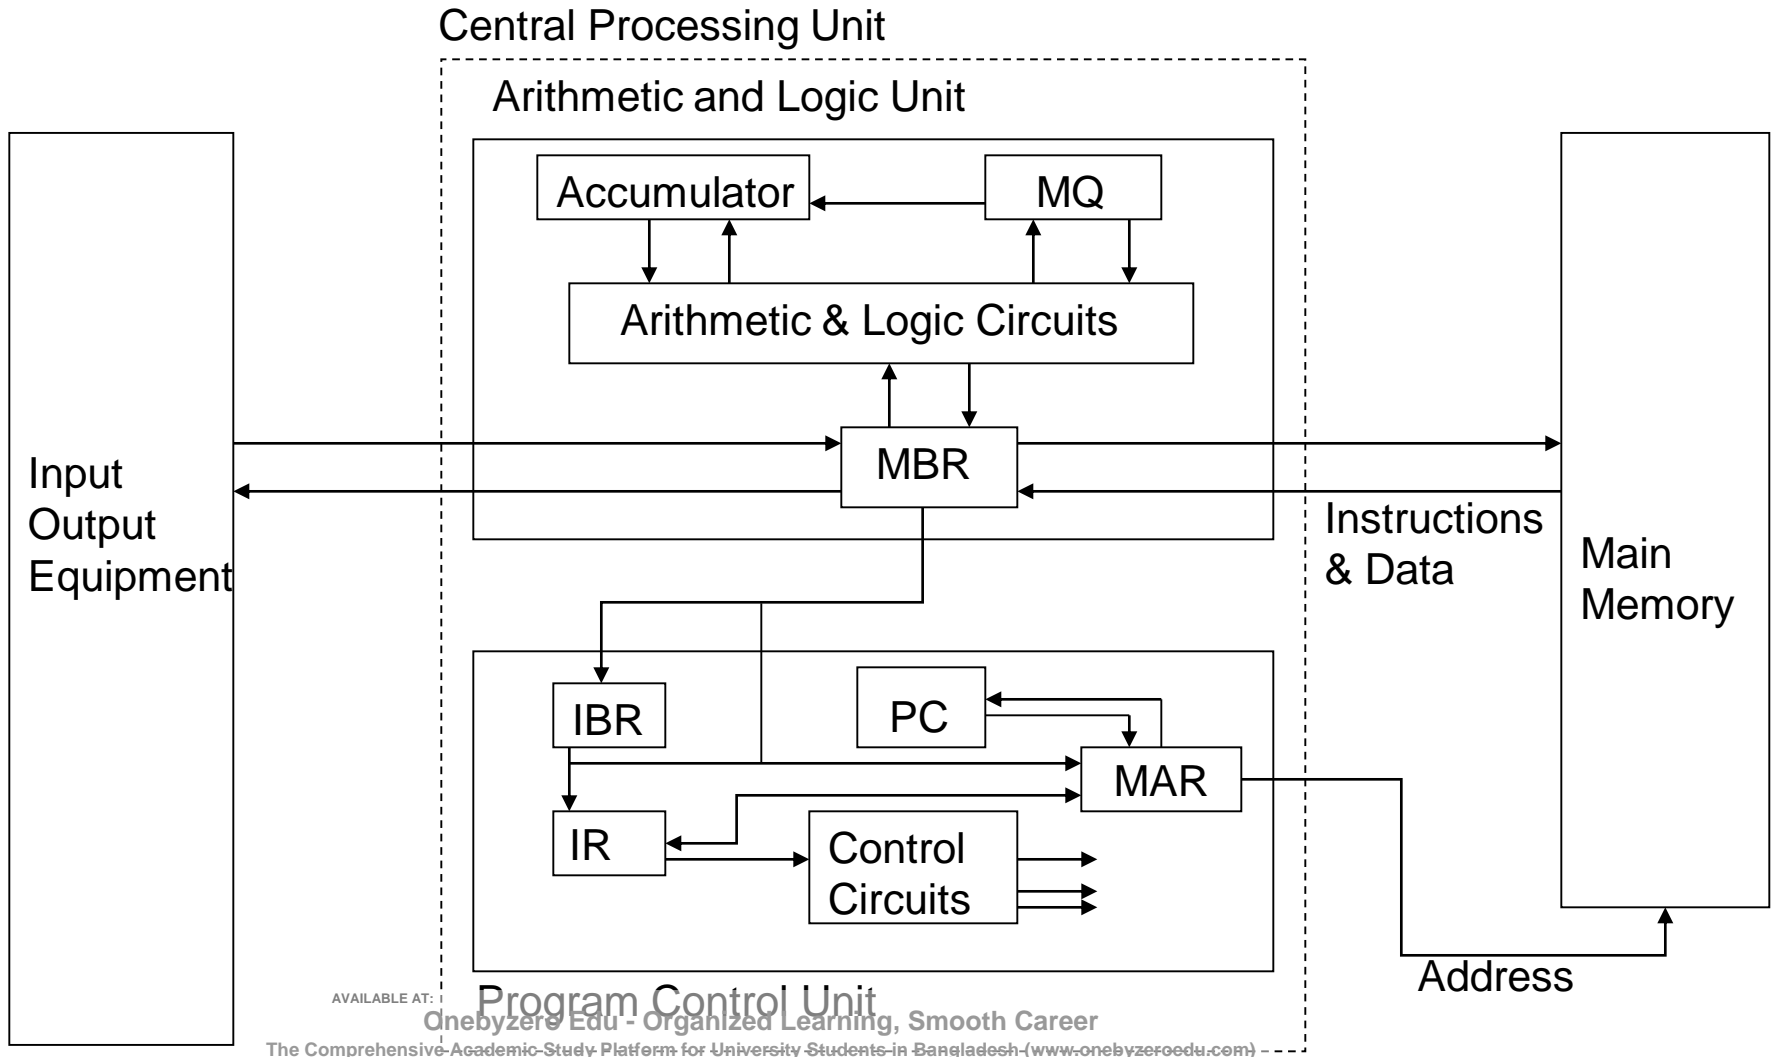

Commercial Computers

- ⌘ 1947 - Eckert-Mauchly Computer Corporation
- ⌘ UNIVAC I (Universal Automatic Computer)
- ⌘ US Bureau of Census 1950 calculations
- ⌘ Became part of Sperry-Rand Corporation
- ⌘ Late 1950s - UNIVAC II
 - ⏏ Faster
 - ⏏ More memory

IBM

- ⌘ Punched-card processing equipment

- ⌘ 1953 - the 701

 - ☑ IBM's first stored program computer

 - ☑ Scientific calculations

- ⌘ 1955 - the 702

 - ☑ Business applications

- ⌘ Lead to 700/7000 series

Transistors

- ⌘ Replaced vacuum tubes
- ⌘ Smaller
- ⌘ Cheaper
- ⌘ Less heat dissipation
- ⌘ Solid State device
- ⌘ Made from Silicon (Sand)
- ⌘ Invented 1947 at Bell Labs
- ⌘ William Shockley et al.

Transistor Based Computers

- ⌘ Second generation machines
- ⌘ NCR & RCA produced small transistor machines
- ⌘ IBM 7000
- ⌘ DEC - 1957
 - ☑ Produced PDP-1

Microelectronics

- ⌘ Literally - “small electronics”
- ⌘ A computer is made up of gates, memory cells and interconnections
- ⌘ These can be manufactured on a semiconductor
- ⌘ e.g. silicon wafer

Generations of Computer

- ⌘ Vacuum tube - 1946-1957
- ⌘ Transistor - 1958-1964
- ⌘ Small scale integration - 1965 on
 - ☒ Up to 100 devices on a chip
- ⌘ Medium scale integration - to 1971
 - ☒ 100-3,000 devices on a chip
- ⌘ Large scale integration - 1971-1977
 - ☒ 3,000 - 100,000 devices on a chip
- ⌘ Very large scale integration - 1978 to date
 - ☒ 100,000 - 100,000,000 devices on a chip
- ⌘ Ultra large scale integration

Moore's Law


- ⌘ Increased density of components on chip
- ⌘ Gordon Moore - cofounder of Intel
- ⌘ Number of transistors on a chip will double every year
- ⌘ Since 1970's development has slowed a little
 - ☒ Number of transistors doubles every 18 months
- ⌘ Cost of a chip has remained almost unchanged
- ⌘ Higher packing density means shorter electrical paths, giving higher performance
- ⌘ Smaller size gives increased flexibility
- ⌘ Reduced power and cooling requirements
- ⌘ Fewer interconnections increases reliability

AVAILABLE AT:

Onebyzero Edu - Organized Learning, Smooth Career

The Comprehensive Academic Study Platform for University Students in Bangladesh (www.onebyzeroedu.com)

Growth in CPU Transistor Count

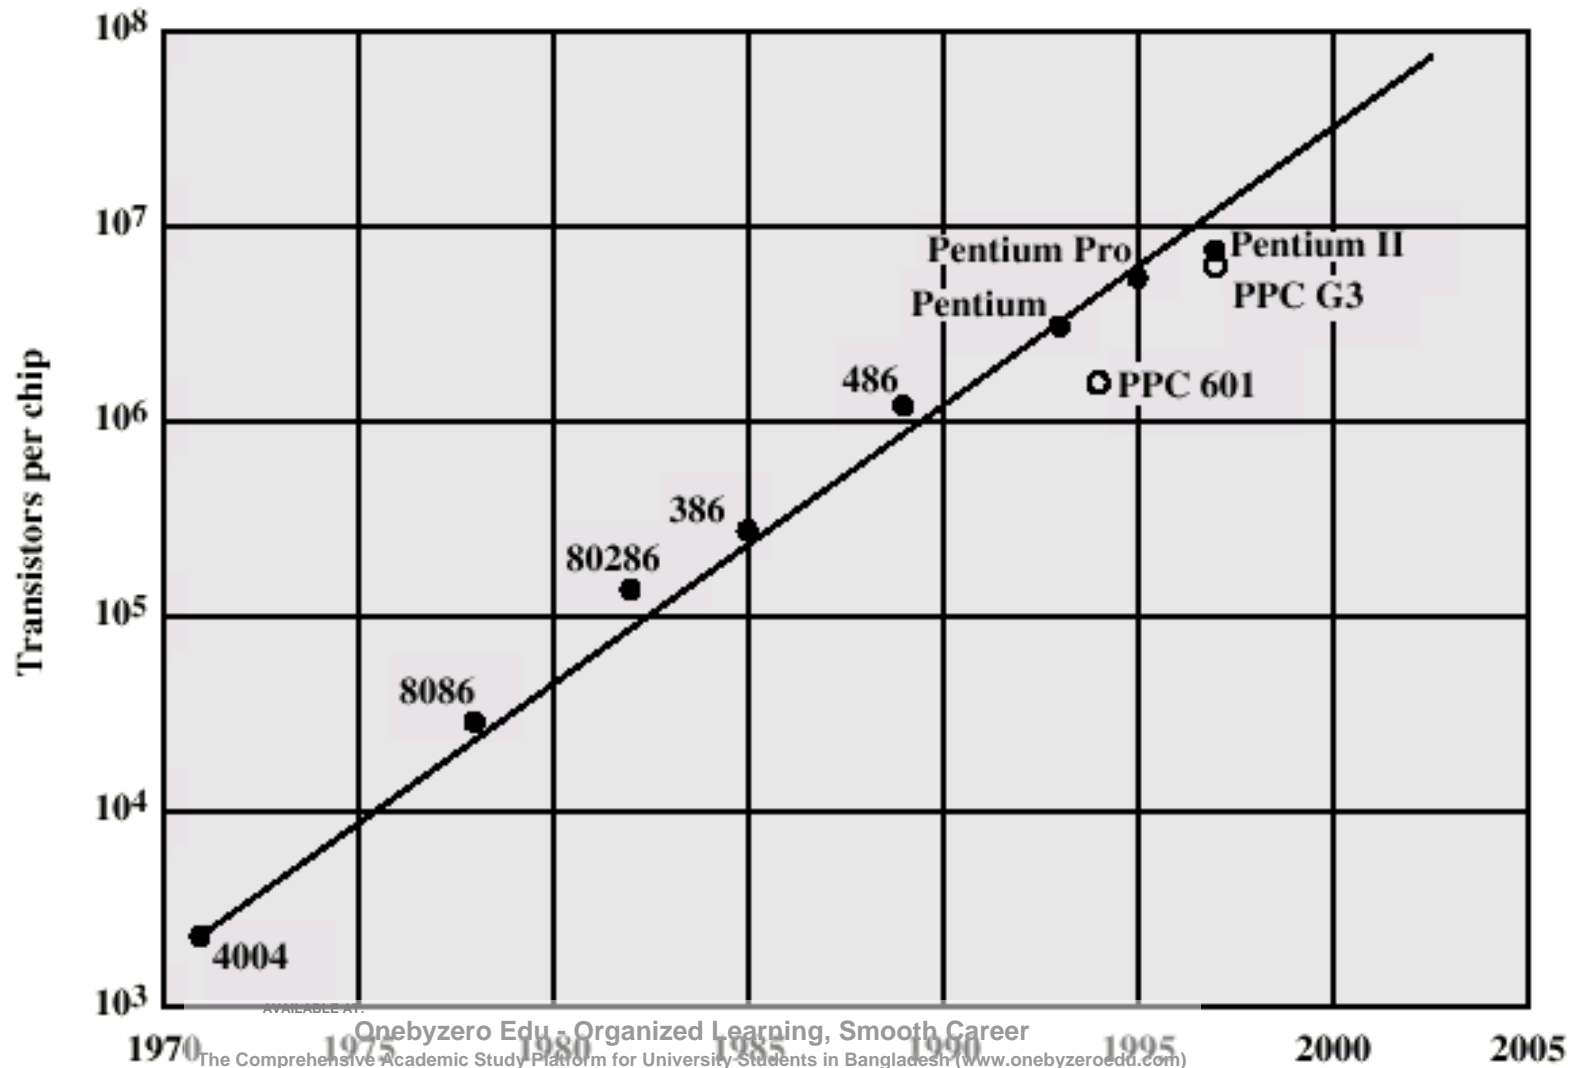

IBM 360 series

⌘ 1964

⌘ Replaced (& not compatible with) 7000 series

⌘ First planned “family” of computers

- ☑ Similar or identical instruction sets

- ☑ Similar or identical O/S

- ☑ Increasing speed

- ☑ Increasing number of I/O ports (i.e. more terminals)

- ☑ Increased memory size

- ☑ Increased cost

⌘ Multiplexed switch structure

DEC PDP-8

⌘ 1964

⌘ First minicomputer (after miniskirt!)

⌘ Did not need air conditioned room

⌘ Small enough to sit on a lab bench


⌘ \$16,000

☒ \$100k+ for IBM 360

⌘ Embedded applications & OEM

⌘ BUS STRUCTURE

DEC - PDP-8 Bus Structure

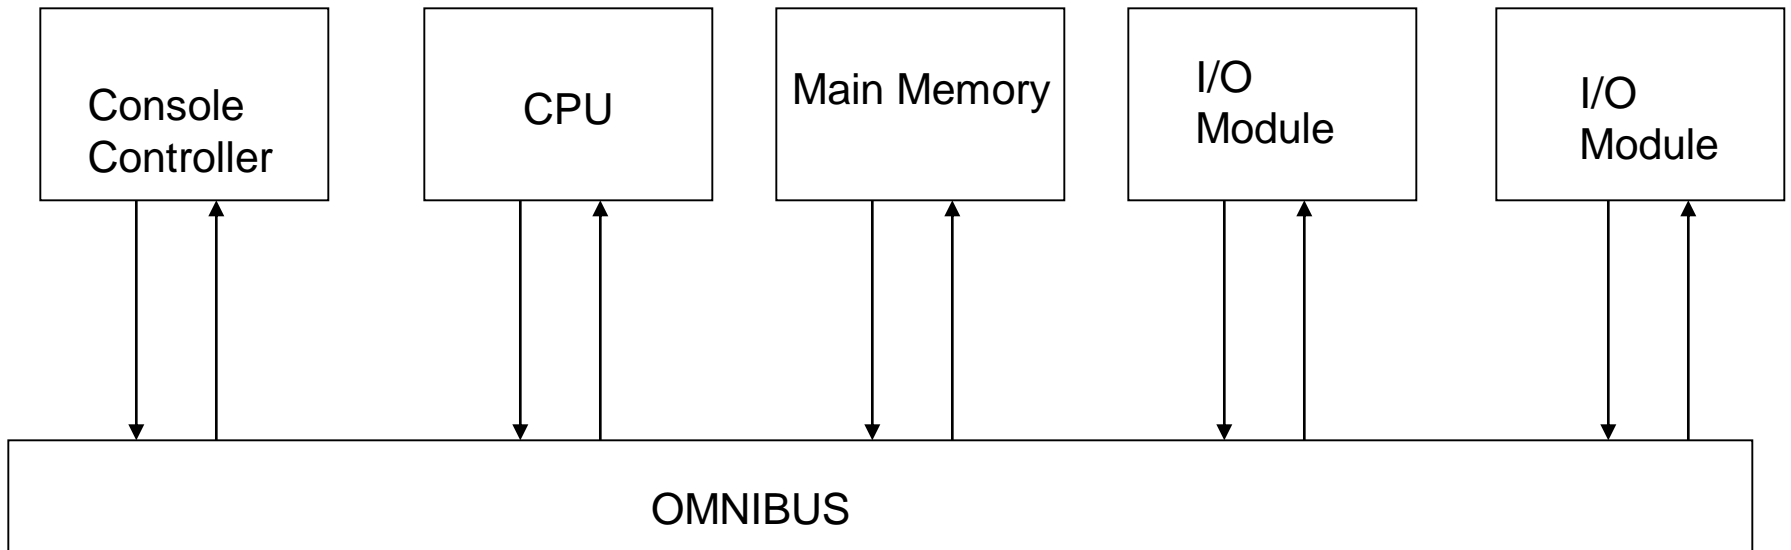

AVAILABLE AT:

Onebyzero Edu - Organized Learning, Smooth Career

The Comprehensive Academic Study Platform for University Students in Bangladesh (www.onebyzeroedu.com)

Semiconductor Memory

⌘ 1970

⌘ Fairchild

⌘ Size of a single core

☑ i.e. 1 bit of magnetic core storage

⌘ Holds 256 bits

⌘ Non-destructive read

⌘ Much faster than core

⌘ Capacity approximately doubles each year

Intel

⌘ 1971 - 4004

- ☑ First microprocessor
- ☑ All CPU components on a single chip
- ☑ 4 bit

⌘ Followed in 1972 by 8008

- ☑ 8 bit
- ☑ Both designed for specific applications

⌘ 1974 - 8080

- ☑ Intel's first general purpose microprocessor


Speeding it up

- ⌘ Pipelining
- ⌘ On board cache
- ⌘ On board L1 & L2 cache
- ⌘ Branch prediction
- ⌘ Data flow analysis
- ⌘ Speculative execution


Performance Mismatch

- ⌘ Processor speed increased
- ⌘ Memory capacity increased
- ⌘ Memory speed lags behind processor speed

DRAM and Processor Characteristics

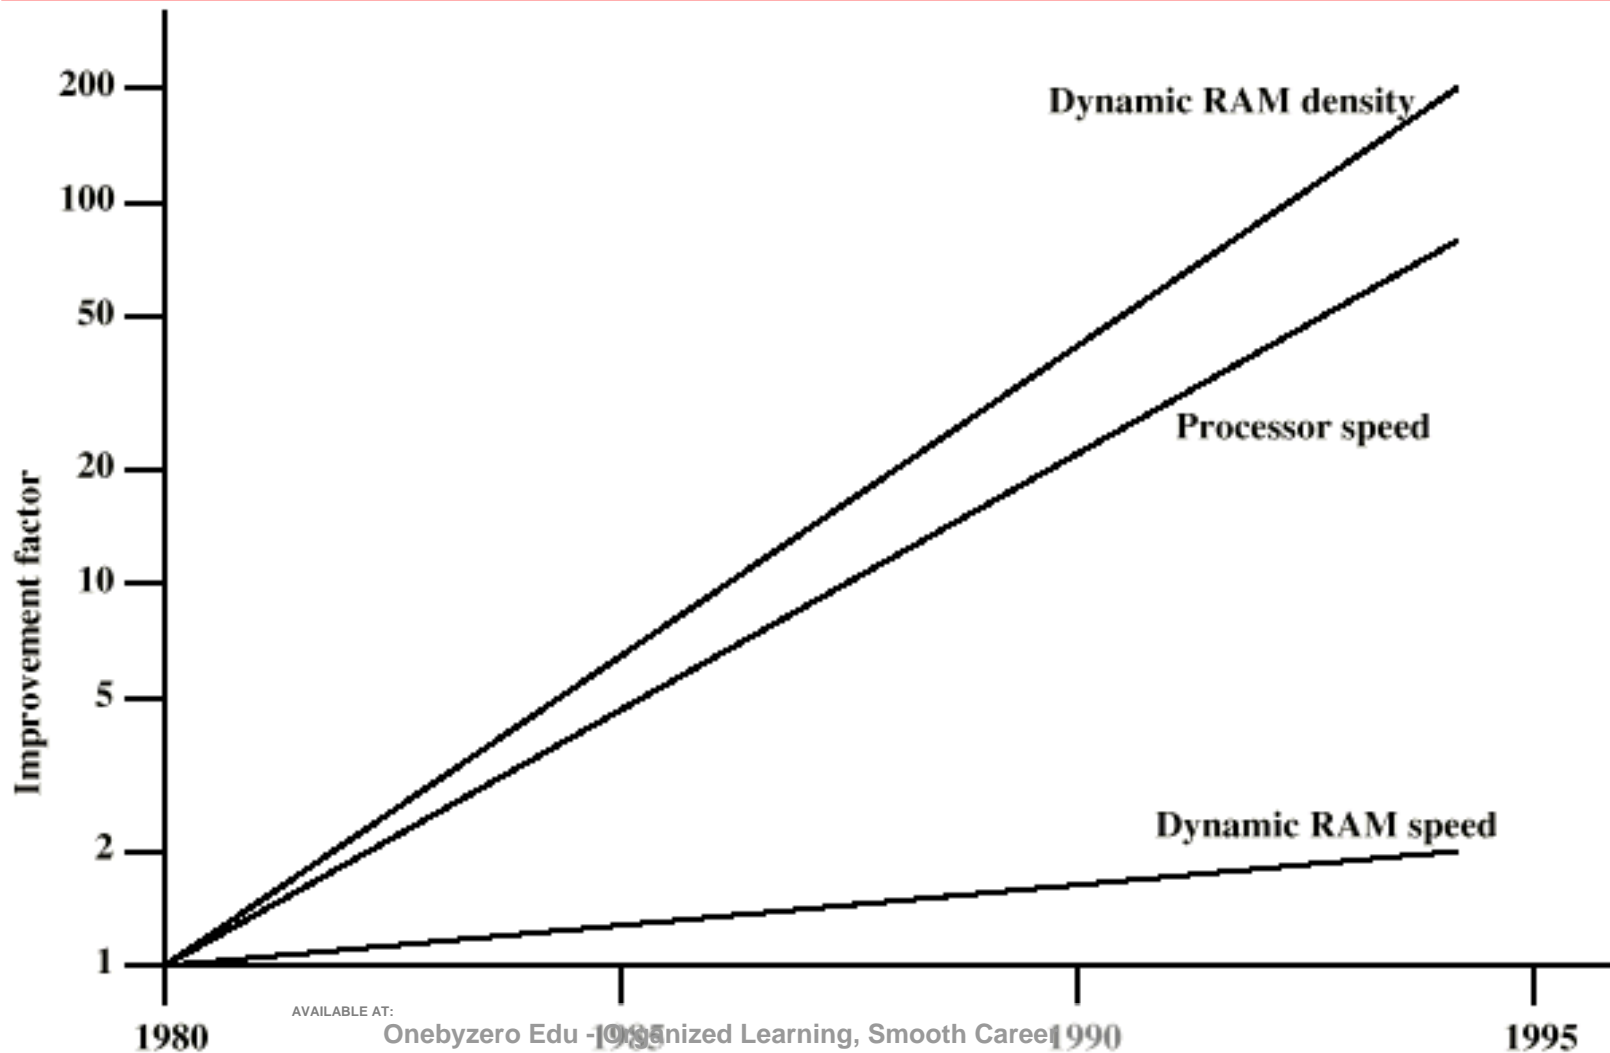

Trends in DRAM use

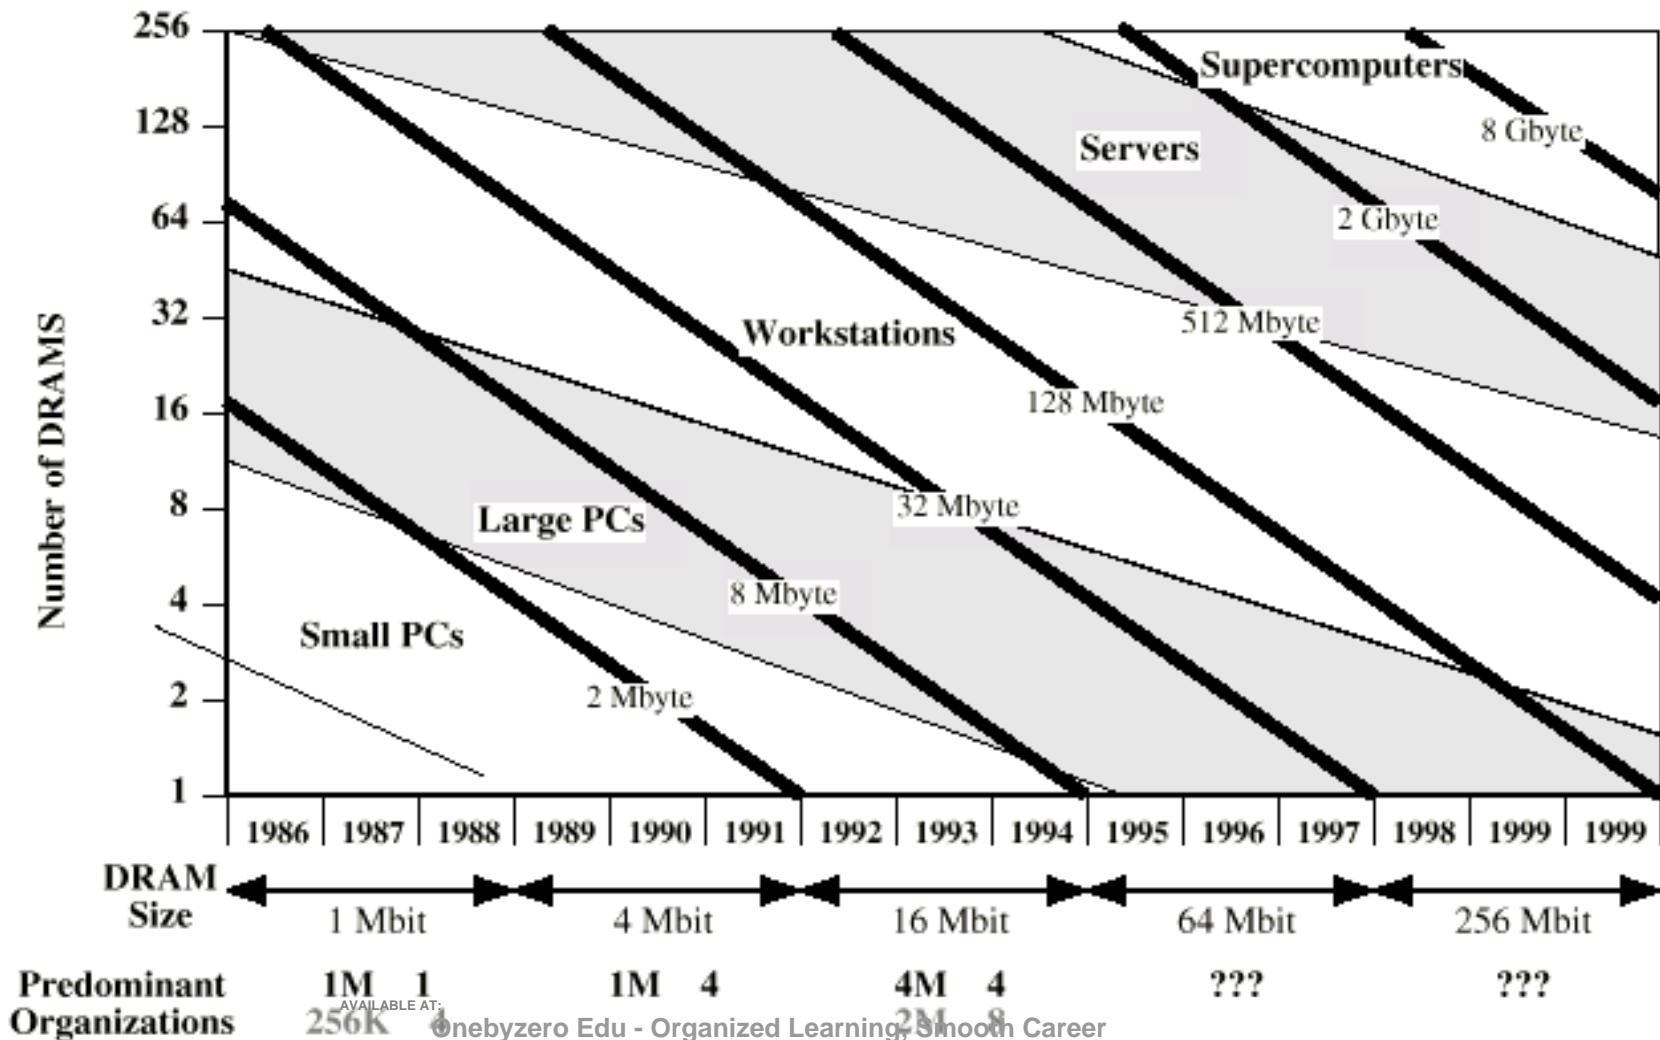

Solutions

- ⌘ Increase number of bits retrieved at one time
 - ☑ Make DRAM “wider” rather than “deeper”
- ⌘ Change DRAM interface
 - ☑ Cache
- ⌘ Reduce frequency of memory access
 - ☑ More complex cache and cache on chip
- ⌘ Increase interconnection bandwidth
 - ☑ High speed buses
 - ☑ Hierarchy of buses

Internet Resources

⌘ <http://www.intel.com/>

☑ Search for the Intel Museum

⌘ <http://www.ibm.com>

⌘ <http://www.dec.com>

⌘ Charles Babbage Institute

⌘ PowerPC

⌘ Intel Developer Home